

FOOT SWITCH FS

Features:

- Protection against dust and water: IP 66, on the electronic box (not for wash-tunnels).
- Colour: Grey and dark grey pedals
- Control of one or two channels
- Modular system
- To be used together with the following control boxes: CB7, CB8, CB9, CB9P, CB12, CB14, CB18, CBJ, CBD1 and CBD2.
- Approx. weight for a pedal unit incl. integrated extra weight: 500 g; a one-channel electronic box: 140 g and a two-channel electronic box: 185 g
- Approved according to EN 60601-1 (IEC 601-1), UL 2601-1 and EN 60950 (IEC 950)

Options:

- Protection class IP 67 on electronic box (not for wash-tunnels)




MEDLINE
IMPROVING EFFICIENCY
TECHLINE
IMPROVING FLEXIBILITY

The foot switch is a modular system, developed for use together with LINAK control boxes.

The LINAK foot switch is designed for control of physiotherapeutic beds, hospital beds, dentist chairs, gynaecologist chairs, computer workstations and work desks etc. It can also be used as a "stand alone" item for industrial applications.

The foot switch is introduced as a modular system consisting of four parts: A left and a right pedal unit (each with two pedals) and two different electronic boxes: for one or two channels.

Dimension:

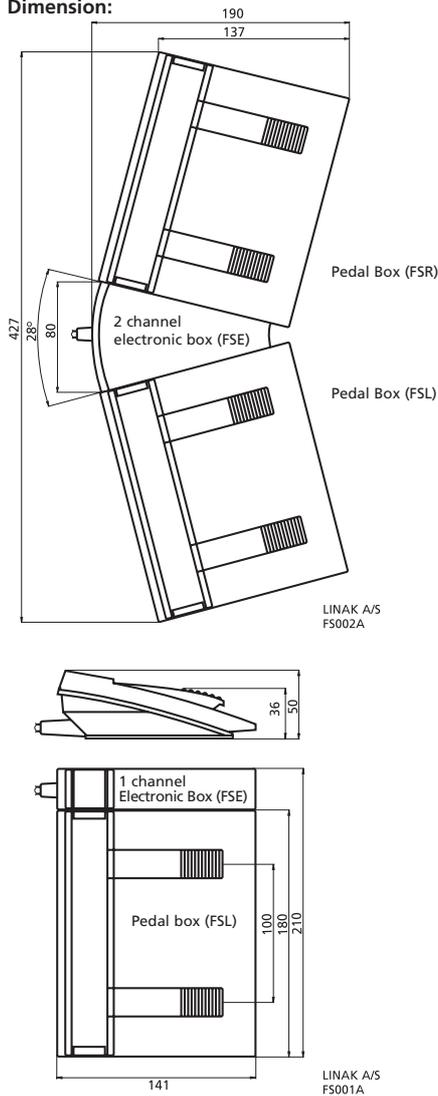

Electronic box FSE

Ordering example:

FSE 1 2 E 00 2 0

Cable:

- 0 = 2.3 m straight 7-core black cable (not if channel 4 or memory)
- 1 = 2.3 m straight 9-core black cable
- 2 = 2.3 m straight 7-core grey cable (not if channel 4 or memory)
- 3 = 2.3 m straight 9-core grey cable
- 4 = 0.5 m coiled 7-core black cable (not if channel 4 or memory)
- 5 = 0.6 m coiled 9-core black cable
- 6 = 0.5 m coiled 7-core grey cable (not if channel 4 or memory)
- 7 = 0.6 m coiled 9-core grey cable
- 8 = 0.6 m coiled cable with modular jack (only CBD1/2 and CB07)

Protection class:

- 2 = IP 66
- 3 = IP 67
- 00 = standard

Used for:

- 0 = standard type: CB8, CB9 CB12 and CB18
- B = standard type: for CBJ2
- E = matrix type: CB9P, CB14 and CBD1
- F = matrix type: CB14O (analogue version - 5 channels)
- J = standard type: CBJ1
- T = standard type for CBD2N (Basic) and CB7

Right pedal box:

- 0 = 1-channel type
- 1 = channel 1
- 2 = channel 2
- 3 = channel 3
- 4 = channel 4
- 5 = channel 5 (only possible for CB14)
- M = memory 1 5 (only possible as 2-channel type)

Combinations for left and right pedal box which are not allowed:
11, 22, 33, 44, 55, MM, WW
01, 02, 03, 04, 05, 0M or 0W

Left pedal box:

- 1 = channel 1
- 2 = channel 2
- 3 = channel 3
- 4 = channel 4
- 5 = channel 5 (only possible for CB14)
- M = memory 1S (only possible with a 2-CH version)
- W = memory S1

Combinations which will give only 1 channel electronic box and a 1 channel foot switch:
10, 20, 30, 40, 50, M0, W0

Type

Pedal box FS

Ordering example:

FS L 0 W 00 000

Front cover:
000 = standard
XXX = customised (state number)


00: standard
W: with weight

Direction (see example at the right):
0: Left pedal = up ; right pedal = down
1: Left pedal = down ; right pedal = up
M*: Left pedal = 1 ; right pedal = S
W*: Left pedal = S ; right pedal = 1

L: Left pedal; for one-channel type or for left pedal
R: Right pedal; for two-channel type only

Type

*For memory on CB14 and CB9P

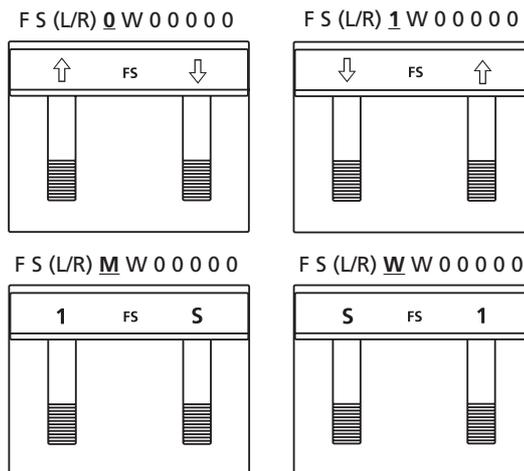

When ordering pedal boxes for a 2 channel type, a left and a right (L/R) pedal box have to be ordered.

Specifications subject to change without prior notice.

It is the responsibility of the product user to determine the suitability of LINAK A/S products for a specific application. LINAK will at point of delivery replace/repair defective products covered by the warranty if promptly returned to the factory. No liability is assumed beyond such replacement/repair.