

Modular system

# Single-axis inverter IndraDrive M - HMS



**Documentation**

- Operating Instructions
- Project Planning Manual

**Technical data**

		HMS01.1N-W0020	HMS01.1N-W0036	HMS01.1N-W0054	HMS01.1N-W0070	HMS01.1N-W0110
<b>Power</b>						
Continuous current	[A]	12.1	21.3	35	42.4	68.5
Maximum current	[A]	20	36	54	70.7	110
Motor nominal power typ.	[kW]	5.5	11	18.5	22	0
Input voltage	[V]	DC 254...750 V				
<b>DC bus</b>						
Switching frequency/max. output frequency	4 kHz	0...400 Hz				
	8 kHz	0...800 Hz				
	12 kHz	0...1200 Hz				
	16 kHz	0...1600 Hz				
Output voltage	[V]	3 x AC 0...500 V				
DC bus voltage	[V] DC	254...750 V				
<b>Control Voltage</b>						
Control Voltage	external	24V ± 20%				
Power consumption without control unit and motor brake	[W]	10	15	10	16	34
<b>Protection</b>						
Category Total		IP20 (IEC529)				
Degree of contamination		2 (EN50178)				
EMC		EN61800-3				
Cooling system		forced ventilated				
<b>Standards</b>						
Certification		EN61800-5-1UL 508 C-				
<b>Weight</b>						
Weight	[kg]	5.27	5.27	6.68	7.94	11.06
<b>Ambient conditions</b>						
Ambient temp. operation	[°C]	0 ... 40 °C				
	Derating [°C]	0 ... 55 °C				
Ambient temp. storage	[°C]	-25...55 °C				
Relative humidity operation	[%]	5...95 %				
Relative humidity storage	[%]	5...95 %				

Modular system


**Single-axis inverter ■ IndraDrive M - HMS**

Installation height	[m]	1000				
	[m] Derating	4000				
		<b>HMS01.1N-W0150</b>	<b>HMS01.1N-W0210</b>	<b>HMS01.1N-W0350</b>	<b>HMS02.1N-W0028</b>	<b>HMS02.1N-W0054</b>
<b>Power</b>						
Continuous current	[A]	99.7	150.7	250	13.82	25
Maximum current	[A]	150	210	350	28.3	54
Motor nominal power typ.	[kW]	55	75	0		
Input voltage	[V]	DC 254...750 V				
<b>DC bus</b>						
Switching frequency/max. output frequency	4 kHz	0...400 Hz				
	8 kHz	0...800 Hz				
	12 kHz	0...1200 Hz			-	0...1200 Hz
	16 kHz	0...1600 Hz		-		0...1600 Hz
Output voltage	[V]	3 x AC 0...500 V				
DC bus capacity	[mF]	0		4.9	0.135	0.27
DC bus voltage	[V] DC	254...750 V				
<b>Control Voltage</b>						
Control Voltage	external	24V ± 20%				
Power consumption without control unit and motor brake	[W]	23	75	218	13	17
<b>Protection</b>						
Category Total		IP20 (IEC529)				
Degree of contamination		2 (EN50178)				
EMC		EN61800-3				
Cooling system		forced ventilated				
<b>Standards</b>						
Certification		EN61800-5-1UL 508 C-				
<b>Weight</b>						
Weight	[kg]	12.74	16.44	31.7	3.5	5
<b>Ambient conditions</b>						
Ambient temp. operation	[°C]	0 ... 40 °C				
	Derating [°C]	0 ... 55 °C				
Ambient temp. storage	[°C]	-25...55 °C				
Relative humidity operation	[%]	5...95 %				
Relative humidity storage	[%]	5...95 %				
Installation height	[m]	1000				
	[m] Derating	4000				

Modular system

**Single-axis inverter ■ IndraDrive M - HMS**

**Dimensions**

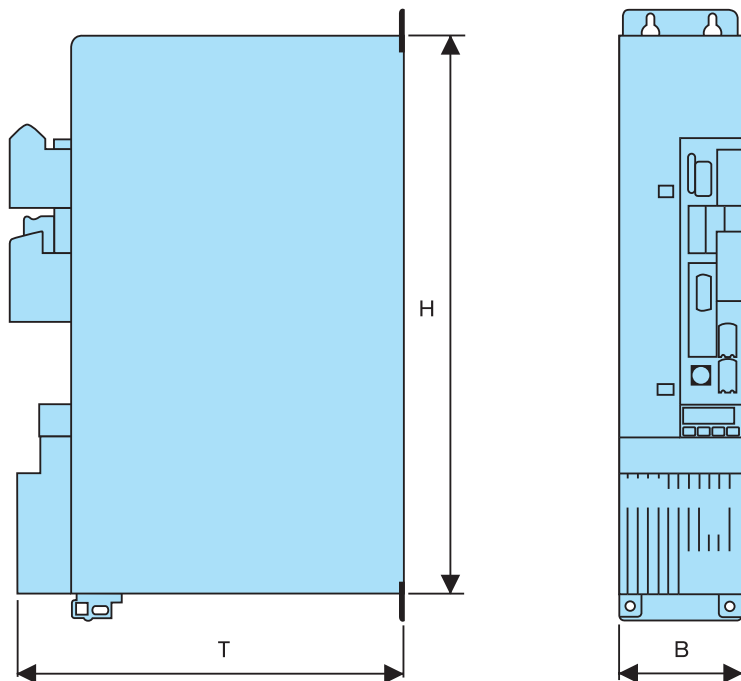

		HMS01.1N-W0020	HMS01.1N-W0036	HMS01.1N-W0054	HMS01.1N-W0070	HMS01.1N-W0110
<b>Dimensions</b>						
<b>Height H</b>	[mm]	440	440	440	440	440
<b>Width W</b>	[mm]	50	50	75	100	125
<b>Depth D</b>	[mm]	262	262	262	262	262

		HMS01.1N-W0350	HMS01.1N-W0210	HMS01.1N-W0150	HMS02.1N-W0028	HMS02.1N-W0054
<b>Dimensions</b>						
<b>Height H</b>	[mm]	440	440	440	352	352
<b>Width W</b>	[mm]	350	200	150	50	75
<b>Depth D</b>	[mm]	262	262	262	205	205

**Components**

Description	Page	Details
Control units	Single-axis	ADVANCED
Control units	Single-axis	BASIC ANALOG
Control units	Single-axis	BASIC OPEN LOOP
Control units	Single-axis	BASIC PROFIBUS
Control units	Single-axis	BASIC SERCOS

Modular system

**Single-axis inverter ■ IndraDrive M - HMS**

---

Description	Page	Details
Control units	Single-axis	BASIC UNIVERSAL

**Bosch Rexroth AG**

Electric Drives and Controls

P.O. Box 13 57

97803 Lohr, Germany

Bgm.-Dr.-Nebel-Str. 2

97816 Lohr, Germany

Phone +49 9352-40-0

Fax +49 9352-40-4885

[www.boschrexroth.com/electrics](http://www.boschrexroth.com/electrics)

The data specified above only serve to describe the product.

As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.